

airvent

AquWall HY

AquWall SI HY



DIMENSIONS:
(width x height x depth)



AquWall HY: 220 x 150 x 52 [mm]



KE 125: 186 x 186x 15 [mm]

MAIN FEATURES:

- ✓ Easy installation in external walls.
- ✓ Automatic airflow regulation via a humidity sensor.
- ✓ Option for manual partial closing of the vent.
- ✓ Effective protection against external noise.
- ✓ Aesthetic appearance.
- ✓ Recommended for use with BHY PRO or Alize Hygro exhaust grilles.

CONSTRUCTION:

The AquWall SI HY set includes:

- 1 AquWall 125 regulator with a Ø 125 mm connector.
- 2 KE125 - external intake grille with a Ø 125 mm connector.
- 3 Spiro Ø 125 mm pipe (optional).




The AquWall SI HY set additionally includes:

- 4 Acoustic silencer.
- 5 ACO-K silencer.




* Also available in a diameter Ø 100.

AIRFLOW:

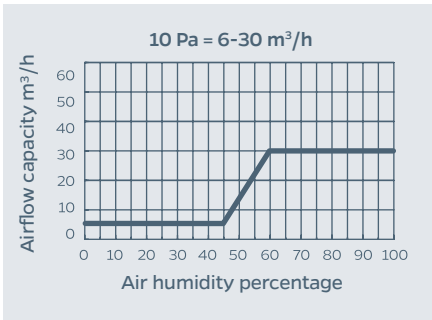

MOUNTING EXAMPLE:

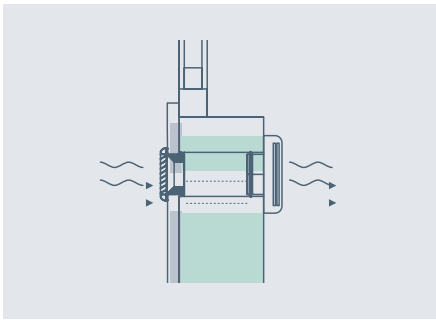

ACOUSTIC REDUCTION:

	Dn, e, w (C; Ctr)	Dn, e, A2**
AquWall HY	40 (0; -1) dB	39 dB
AquWall SI HY	51 (-1; -4) dB	47 dB

**Dn, e, A2: noise reduction index, focusing on low frequencies such as urban traffic, disco music, slow-moving trains, and distant jet aircraft.